



EN 450 Classroom Lighting Control

Version 1.00

1. The classroom is equipped with dimmable LED lighting configured into two zones – perimeter and center. There are motion detectors installed to turn off the lights when the room is not being used. The adjustable lighting controls adjacent to the two sets of entry doors override the motion sensor controls.

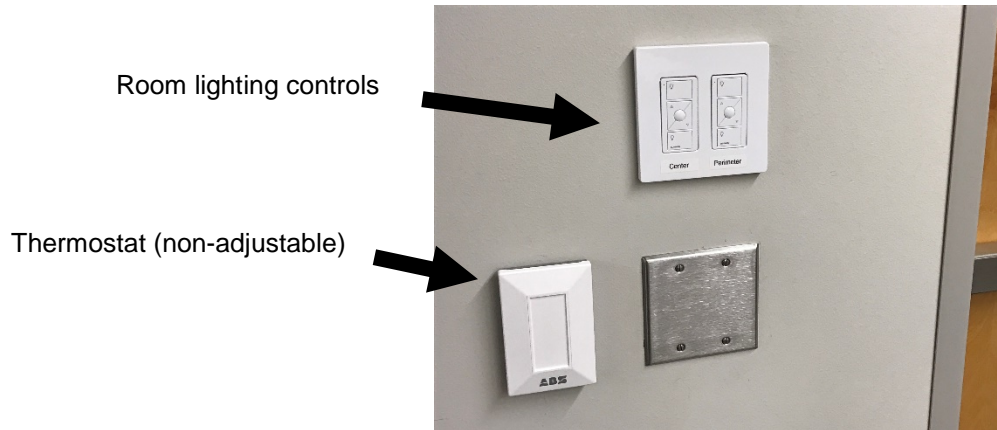


2. Lighting control operation.

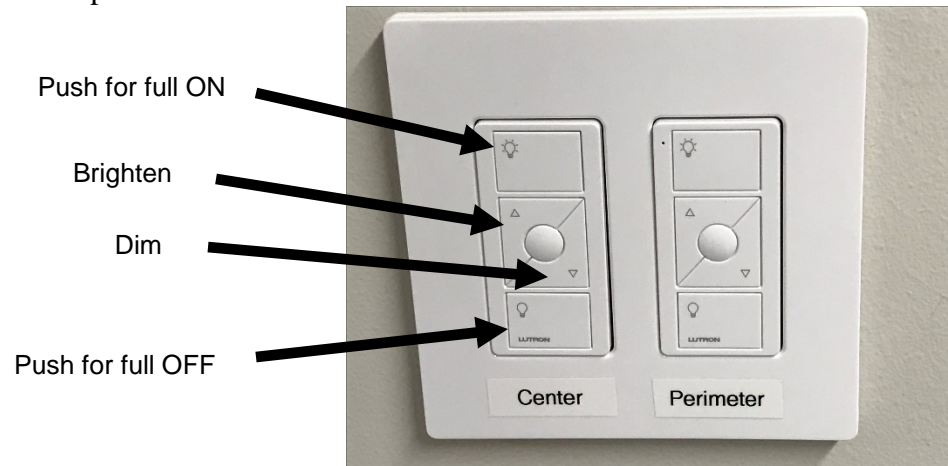

3. Room lighting zones.



4. There are two sets of adjustable window blinds installed in each window well. The outer shade nearest the window pane is rated at 95 % opacity. The inner shade is a blackout shade rated at 100 % opacity. The shades are raised and lowered using the chain pulls attached to each window shade. Instructors are free to adjust the window shades as needed.

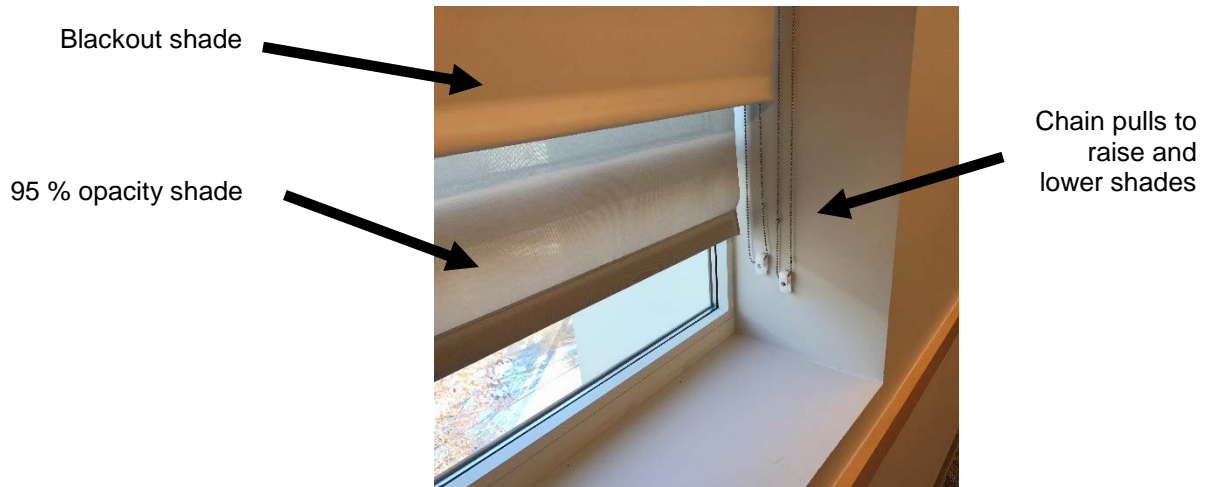

rw